

# Premium Portable Oxygen Analyzers

## **GPR-1200 & GPR-3500**

The premium portable oxygen analyzers from Analytical Industries have been designed to last in demanding field conditions. The Model GPR-3500, packaged in a rugged enclosure, with stainless steel wetted parts, integrated flow meters and needle valves, offers purity measurement for inert gases, carbon-dioxide and oxygen.

GPR-1200 customers value the 4-way valve that allows a sample to be trapped in the sensor to speed up measurement times when moving from point to point. This analyzer feature also effectively helps to protect trace oxygen sensors from premature depletion due to exposure to ambient oxygen levels.



### **Highlights**


- Measurement ranges from 0-10 ppm up to 0-100% O<sub>2</sub>
- Accuracy of better than 2% of range
- 24-32 months sensor life span (in normal use).
- Up to 30 days battery life
- Internal pump option
- 0-1V output
- XLT sensor options for CO<sub>2</sub> backgrounds
- Rugged industrial enclosures

### **Applications**



- Servicing oxygen and nitrogen generators
- Spot checks of oxygen in tankers during delivery
- Semi-conductor pipeline validation
- Headspace checks in fermenters and brew tanks
- Leak checking processes

## Sensor Technology

The sensors from AII have been designed to avoid potential weaknesses common in typical galvanic cell design. Our materials, construction and assembly methods have been continuously refined over decades. Each sensor type has been specifically engineered to provide the optimum balance between performance and longevity for individual applications. The result is confidence in the measurement and low maintenance. In the absence of oxygen, the sensor will produce zero output and the sensor is linear up to 100%, therefore only a span calibration is required in most cases (see graph).

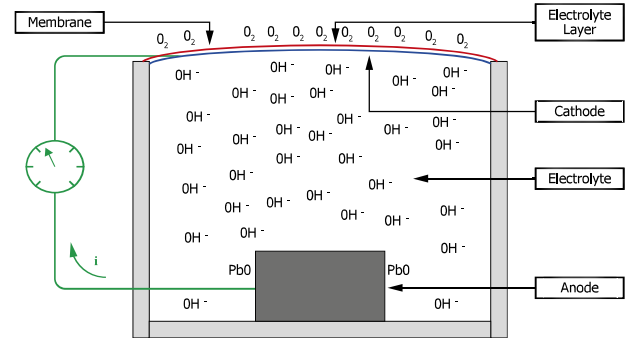

Sensor Construction

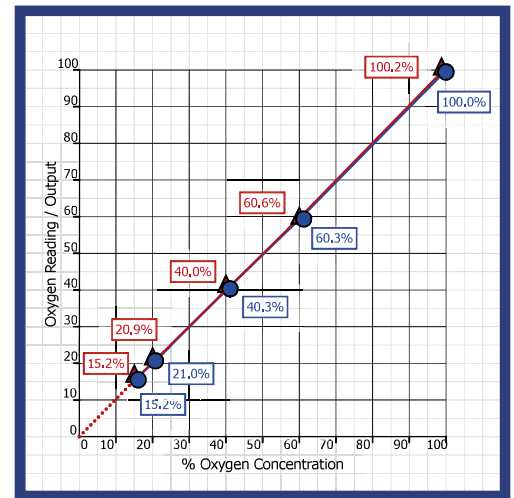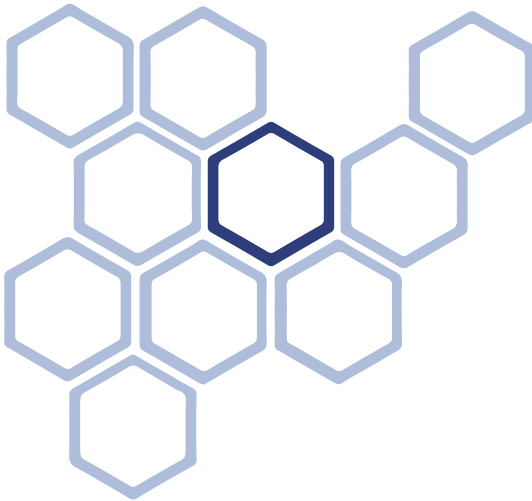

Typical sensor output

## The Analytical Industries' XLT sensor

For applications with a background gas containing more than 0.5% CO<sub>2</sub>, the specially designed XLT sensor should be selected. With most standard electrochemical sensors an alkaline electrolyte is used and this is neutralised over time when exposed to acidic gases, such as CO<sub>2</sub>. To combat this, AII developed the XLT sensor with a special electrolyte formula which has the added benefit of being able to operate in temperatures as low as -10°C.

### **Options available across the range:**

- Carry case for safe transportation
- Coalescing filters and sampling accessories
- ATEX and General Purpose versions

### **GPR-1200 MS-2 (ATEX)**

Designed for spot-checking ultra-high purity gases, the GPR-1200 MS-2 has a range of 0-1 ppm and LDL of 5 ppb O<sub>2</sub> – the lowest oxygen measurements available with a portable instrument. ATEX-approved version available.

**Ranges available:** 0-1, 0-10, 0-100 & 0-1,000 ppm O<sub>2</sub>

### **GPR-1200 (ATEX)**

The standard low ppm portable oxygen analyzer offers a range of 0-10 ppm and an LDL of 50 ppb O<sub>2</sub>, with the option of the XLT sensor for measuring in CO<sub>2</sub> backgrounds, and an internal sample pump. ATEX approved version available.

**Ranges available:** 0-10, 0-100, 0-1,000 ppm, 0-1% & 0-25% O<sub>2</sub>

### **GPR-3500 MOVR**

For measuring 0-100% oxygen in general purpose areas, this analyzer offers temperature compensation and is supplied with an integral pressure regulator. The LDL is 0.5% O<sub>2</sub> and can be enhanced with a zero calibration).

**Range Available:** 0-100% O<sub>2</sub>

For the full selection of all portable oxygen analyzer models offered by Analytical Industries Inc. please see our portables and hand-held data sheets available on [www.aii1.com](http://www.aii1.com) as well as the related instrument section at the end of this document.



## Technical Specifications

	GPR-1200 MS-2	GPR-1200	GPR-3500 MOVR
<b>Measurement range</b>	0-1, 0-10, 0-100, 0-1000 ppm	0-10, 0-100, 0-1000 ppm, 0-1% 0-25%	0-100%
<b>Accuracy</b>	< 3% or 10 ppb (whichever is greater) at constant conditions	< 2% or 0.2 ppm (whichever is greater) at constant conditions	< 2% at constant conditions
<b>Response time</b>	T90 <10 seconds		T90 <13 seconds
<b>Sensitivity (LDL)</b>	5 ppb	0.05 ppm	0.1%
<b>Linearity</b>	< 1% of scale		
<b>Sensor model</b>	GPR-12-2000MS-2	GPR-12-333 XLT-12-333 for gas mixture with > 0.5% CO <sub>2</sub>	GPR-11-120-OP
<b>Sensor life at 25°C (77°F) and 1 atm</b>	24 months in < 100 ppm O <sub>2</sub>	24 months in < 1000 ppm O <sub>2</sub>	24 months in 100% O <sub>2</sub>
<b>Calibration interval</b>	30 days		
<b>Inlet pressure</b>	0.34 – 2 barg (5-30 psig) with atmospheric vent		248.2 barg (3600 psig) with atmospheric vent
<b>Flow rate</b>	0.5 - 1.0 NI/m (1-2 SCFH)		
<b>Gas connections</b>	1/8" compression tube fittings 1/4" compression tube fitting on outlet (GPR-3500-MOVR)		
<b>Wetted parts</b>	Stainless steel		
<b>Display</b>	Graphical LCD 7 x 3.5cm (2.75 x 1.375")		
<b>Resolution</b>	0.001 ppm	0.01 ppm	0.1 %
<b>Enclosure</b>	Painted aluminum NEMA 4X, 21.8 x 22.9 x 7.6cm (8.6 x 9 x 3")		
<b>Weight</b>	5.4kg (12lbs)		
<b>Compensation</b>	Barometric pressure and temperature		
<b>Signal output</b>	0-1V		
<b>LED indicators</b>	LOW BATT (72 hr. warning); CHARGE mode		
<b>Operating temperature</b>	GPR sensor: 5°C to 45°C (41°F to 113°F) XLT sensor: -10°C to 45°C (14°F to 113°F)		
<b>Power</b>	Rechargeable battery (lead acid)		
<b>Battery life</b>	Up to 30 days on a single charge (40 hours with pump running, if fitted)		
<b>Area classification</b>	General purpose (safe area) Meets standards UL: Class I, Division 1, Groups C, D  ATEX: II 2 G Ex ib IIC T4 Gb T <sub>amb</sub> +5°C to +45°C	General purpose (safe area) Meets standards UL: Class I, Division 1, Groups C, D  ATEX: II 2 G Ex ib IIC T4 Gb T <sub>amb</sub> 20°C to +45°C	General purpose only

### Related instruments:

#### Portable oxygen analyzers

Suitable for trace oxygen measurements from 0.1 ppm through to purity applications at 100% oxygen, these rugged portable instruments share the same advanced sensor technology as the online process oxygen analyzers ensuring confidence in their reliability and accuracy.

#### Handheld devices

Compact and convenient handheld analyzers to measure oxygen concentrations for welding, diving and personnel safety applications.



**Analytical Industries Inc.** 2855 Metropolitan Place, Pomona, CA 91767 USA  
Tel: 909-392-6900, Fax: 909-392-3665, [www.aii1.com](http://www.aii1.com), e-mail: [info@aii1.com](mailto:info@aii1.com)

Please note: Analytical Industries Inc. adopts a continuous development program which sometimes necessitates specification changes without notice.  
Please contact us for the latest version. Issue No: Premium Portable Oxygen Analyzers\_V1\_US\_1217